



MGJ2 Series 5.2kVDC Isolated 2W Gate Drive DC-DC Converters

FEATURES

- Optimised bipolar output voltages for IGBT/Mosfet gate drives
- Reinforced insulation to UL60950 recognised
- ANSI/AAMI ES60601-1, 1 MOPP/2 MOOP's recognised³
- 5.2kVDC isolation test voltage 'Hi Pot Test'
- Ultra low coupling capacitance
- SIP package style
- 5V, 12V, 15V & 24V inputs
- +15V/-3V, +15V/-5V, +15V/-8.7V, +15V/-15V, +17V/-9V, +18V/-2.5V, +20V/-3.5V & +20V/-5V outputs
- Operation to 100°C
- Characterised $CMTI > 200kV/\mu S$
- Continuous barrier withstand voltage 2.4kVDC
- Characterised partial discharge performance
- ROHS COMPLIANT

PRODUCT OVERVIEW

The MGJ2 series of DC-DC converters is ideal for powering 'high side' and 'low side' gate drive circuits for IGBTs and Mosfets in bridge circuits. A choice of asymmetric output voltages allows optimum drive levels for best system efficiency and EMI. The MGJ2 series is characterised for high isolation and dv/dt requirements commonly seen in bridge circuits used in motor drives and inverters, while the MGJ2 industrial grade temperature rating and construction gives long service life and reliability.

SELECTION GUIDE

SELECTION GUIDE

Order Code	Performance Parameters												MTTF ¹												
	Nominal Input Voltage		Output Voltage 1		Output Current 1		Output Current 2		Input Current at Rated Load		Load Regulation (Typ)		Load Regulation (Max)		Ripple & Noise (Typ) ²		Ripple & Noise (Max) ²		Efficiency (Min)		Efficiency (Typ)		Isolation Capacitance		
	V	V	V	V	mA	mA	%	%	mVp-p	mVp-p	%	%	pF	kHrs	MIL.	Tel.									
MGJ2D051505SC	5	15	-5	80	40	360	5.7	7	30	50	71	76	3	2095											
MGJ2D051509SC	5	15	-8.7	80	40	390	6	7	30	50	73	77.5	3	1902											
MGJ2D051515SC	5	15	-15	67	67	492	7	8.5	20	35	74	78	3	2629											
MGJ2D051802SC	5	18	-2.5	80	80	410	9	12	20	50	70	75	3	1376	31920										
MGJ2D052003SC	5	20	-3.5	80	80	470	8	11	20	50	72	77	3	1253	32603										
MGJ2D052005SC	5	20	-5	80	40	440	6.2	8	30	50	74	78.5	3	1655											
MGJ2D121503SC	12	15	-3	95	95	170	8	10	25	50	76	80	3	2014	80644										
MGJ2D121505SC	12	15	-5	80	40	150	4.7	6	30	50	76	80	3	2339											
MGJ2D121509SC	12	15	-8.7	80	40	155	5.3	7.5	30	50	76	80	3	2296											
MGJ2D121515SC	12	15	-15	67	67	203	6.0	7	24	40	78	82	3	2707											
MGJ2D121802SC	12	18	-2.5	80	80	170	8	11	20	50	74	80	3	1553	36519										
MGJ2D122003SC	12	20	-3.5	80	80	190	7	10	20	50	77	82	3	1371	36431										
MGJ2D122005SC	12	20	-5	80	40	195	5.5	8	30	45	78	82	3	1799											
MGJ2D151505SC	15	15	-5	80	40	120	5	7	30	50	75	80	3	2374											
MGJ2D151509SC	15	15	-8.7	80	40	130	5	7	30	50	76	80	3	2736											
MGJ2D151515SC	15	15	-15	67	67	167	5.5	7	23	35	75	79	3	2100											
MGJ2D151802SC	15	18	-2.5	80	80	130	8	11	20	50	73	79	3	1392	32908										
MGJ2D152003SC	15	20	-3.5	80	80	150	7	10	20	50	76	81	3	2000	80000										
MGJ2D152005SC	15	20	-5	80	40	145	6	8	30	50	78	81	3	1864											
MGJ2D241503SC	24	15	-3	95	95	90	8	10	25	50	76	80	4	2535	70910										
MGJ2D241505SC	24	15	-5	80	40	75	4.6	7	30	50	75	80.5	4	2194											
MGJ2D241509SC	24	15	-8.7	80	40	80	4.8	7	30	50	77	82	4	2275											
MGJ2D241709SC	24	17	-9	80	80	105	6	8	30	50	78	83	4	1050	47000										
MGJ2D241802SC	24	18	-2.5	80	80	90	8	11	20	50	74	80	4	1461	32315										
MGJ2D242003SC	24	20	-3.5	80	80	90	7	10	20	50	76	82	4	1333	32482										
MGJ2D242005SC	24	20	-5	80	40	90	6	8	30	50	78	82	4	1725											

INPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Voltage range	Continuous operation, 5V input types	4.5	5	5.5	V
	Continuous operation, 12V input types	10.8	12	13.2	V
	Continuous operation, 15V input types	13.5	15	16.5	V
	Continuous operation, 24V input types	21.6	24	26.4	V

Input reflected ripple	051505, 051509, 051515, 052003 & 052005 types	-	40	-	mA
	121503, 121505, 121509, 121515, 122003, 122005, 151505, 151509, 151515 & 152005 types	-	20	-	mA
	051802, 241505, 241509, 241709, 241802 & 242005 types	-	15	-	mA
	122003, 121802, 151802, 152003, 241503, 241802 & 242003 types	-	10	-	mA

OUTPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Rated Power	TA = -40 °C to 100 °C	-	-	2	W
Voltage Set Point Accuracy	See tolerance envelopes	-	-	-	-
Line regulation	High VIN to low VIN	-	1.0	1.2	%/%

ISOLATION CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation test voltage	Production tested for 1 second	5200	-	-	VDC
	Qualification tested for 1 minute	5200	-	-	VDC
Resistance	Viso= 500VDC	-	1	-	GΩ
Continuous barrier withstand voltage	Non-safety barrier application	-	-	2400	VDC

Safety standard (UL60950-1)	MGJ2Dxx1515SC types (Basic/supplementary)	-	-	200	Vrms
	All others (Reinforced)	-	-	150	Vrms
	All others (Basic/supplementary)	-	-	300	Vrms
Safety standard (ANSI/AAMI ES60601-1)	MGJ2Dxx1515SC types (1 MOOP)	-	-	200	Vrms
	All others ¹ (1 MOOP)	-	-	300	Vrms
	All others ¹ (2 MOOP/1 MOPP)	-	-	200	Vrms

GENERAL CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Switching frequency	MGJ2Dxx1802SC & MGJ2D241503SC types	-	45	-	kHz
	All other types	-	50	-	kHz

TEMPERATURE CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Specification	All output types (see safety approval section for limitations)	-40	-	100	°C
Storage	-	-55	-	125	°C
Case Temperature above	5V input types	-	24	-	°C

ambient					
	All other input types	-	20	-	°C
Cooling	Free air convection	-	-	-	-

ABSOLUTE MAXIMUM RATINGS

Parameter	Rating
Short-circuit protection	Continuous
Lead temperature 1mm from case for 10 seconds	260°C
Input voltage VIN, MGJ2D05xxxxSC	5.5V
Input voltage VIN, MGJ2D12xxxxSC	13.2V
Input voltage VIN, MGJ2D15xxxxSC	16.5V
Input voltage VIN, MGJ2D24xxxxSC	26.4V
Wave Solder	Wave Solder profile not to exceed the profile recommended in IEC 61760-1 Section 6.1.3. Please refer to application notes for further information.

¹ ANSI/AAMI ES60601-1 recognition is currently pending for the MGJ2D241709SC, MGJ2Dxx1515SC, MGJ2Dxx1802SC, MGJ2Dxx1503SC and MGJ2Dxx2003SC variants.

² See ripple & noise test method.

³ Calculated using MIL-HDBK-217 FN2 and Telecordia SR-332 calculation model with nominal input voltage at full load.

All specifications typical at TA=25°C, nominal input voltage and rated output current

unless otherwise specified.

TECHNICAL NOTES

ISOLATION VOLTAGE

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

The MGJ2 series of DC-DC converters are all 100% production tested at 5.2kVDC for 1 second and have been qualification tested at 5.2kVDC for 1 minute.

The MGJ2 series is recognised by Underwriters Laboratory, please see safety approval section for more information. When the insulation in the MGJ2 series is not used as a safety barrier, i.e. provides functional isolation only, continuous or switched voltages across the barrier up to 2.4kV are sustainable. This is established by measuring the partial discharge Inception voltage in accordance with IEC 60270. Please contact our technical support for further information.

REPEATED HIGH-VOLTAGE ISOLATION TESTING

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

SAFETY APPROVAL

MGJ2Dxx1515SC

ANSI/AAMI ES60601-1

The MGJ2Dxx1515SC variants are pending recognition by Underwriters Laboratory (UL) to ANSI/AAMI ES60601-1 and provides 1 MOOP (Means Of Operator Protection) based upon a working voltage of 200 Vrms max and 280 Vpk max., between Primary and Secondary and between Primary and its Enclosure, in a maximum ambient temperature of 85°C and/or case temperature limit of 130°C (case temperature measured on the face opposite the pins).

File Number E202895 applies.

UL60950

The MGJ2Dxx1515SC variants have been recognised by Underwriters Laboratory (UL) to UL60950 for basic/supplementary insulation to a working voltage of 200Vrms

in a maximum ambient temperature of 85°C and/or case temperature limit of 130°C (case temperature measured on the face opposite the pins).

File number E151252 applies.

- Creepage and clearance: 2mm
- Working altitude: 4000m

Fusing

The MGJ2 Series of converters are not internally fused so to meet the requirements of UL an anti-surge input line fuse should always be used with ratings as defined below.

- MGJ2D051515SC: 2A
- MGJ2D121515SC: 750mA
- MGJ2D151515SC: 750mA

All fuses should be UL recognised and rated to 125V.

All other variants

ANSI/AAMI ES60601-1

The MGJ2 series has been recognised by Underwriters Laboratory (UL) to ANSI/AAMI ES60601-1 and provides 1 MOOP (Means Of Operator Protection) based on a working voltage of 300Vrms or 2 MOOP based upon a working voltage of 200 Vrms, and 1 MOPP (Mean Of Patient Protection) based on a working voltage of 200Vrms., between Primary and Secondary. The MGJ2D241709SC, MGJ2Dxx1802SC, MGJ2Dxx1503SC and MGJ2Dxx2003SC variants are currently pending recognition.

File number E202895 applies.

UL60950

The MGJ2 series is recognised by Underwriters Laboratory (UL) to UL60950 for reinforced insulation to a working voltage of 150Vrms and for basic/supplementary insulation to a working voltage of 300Vrms.

File number E151252 applies.

Over voltage category	OVC I	OVC II
Working voltage	150Vrms	300Vrms
Working altitude	2000m	2000m

Creepage & clearance	2mm	2mm
----------------------	-----	-----

Fusing

The MGJ2 Series of converters are not internally fused so to meet the requirements of UL an anti-surge input line fuse should always be used with ratings as defined below.

- MGJ2D05xxxxSC: 1.25A
- MGJ2D12xxxxSC: 750mA
- MGJ2D15xxxxSC: 750mA
- MGJ2D24xxxxSC: 750mA

All fuses should be UL recognised and rated to 125V.

RoHS COMPLIANCE INFORMATION

This series is compatible with RoHS soldering systems with a peak wave solder temperature of 260°C for 10 seconds. Please refer to application notes for further information. The pin termination finish on this product series is Tin Plate, Hot Dipped over Matte Tin with Nickel Preplate. The series is backward compatible with Sn/Pb soldering systems.

ENVIRONMENTAL VALIDATION TESTING

The following tests have been conducted on this product series, as part of our design verification process. The datasheet characteristics specify user operating conditions for this series, please contact our technical support if further information about the tests is required.

Test	Standard	Condition
Temperature cycling	MIL-STD-883 Method 1010, Condition B	10 cycles between two chambers set to achieve -55°C and +125°C. The dwell time shall not be less than 10min.
Humidity bias	JEDEC JESD22-A101	85°C ± 2°C, 85% ± 5% R.H. for >1000 hours.
High temperature storage life	JEDEC JESD22-A103, Condition A	125°C +10/-0°C for ≥1000 hours.
Vibration	MIL-STD-883 Method	1.5mm pk-pk / 20g pk min, 20-2000Hz, 4 sweeps in each of 3 mutually perpendicular

	2007, Condition A	axes at 3 oct/min.
Shock	MIL-STD-883 Method 2002, Condition A	500g 1.0ms half sine, 5 shocks in each direction of 3 mutually perpendicular axis.
Bump	JEDEC JESD22-A114	IEC Class 4M5 of ETS 300 019-2-4 Shock Spectrum Type II, 6mS duration, 250m/s ² 500 bumps in 6 directions.
ESD	HBM Testing Standard	At 3 stress levels; 2.0kV, 4.0kV and 8.0kV.
Solderability (SnPb)	IPC/ECA J-STD-002, Test A	For leaded solderability the parts are conditioned in a steam ager for 8 hours ±15 min. at a temperature of 93±3°C. Dipped in solder at 245°C ±5°C for 5 +0/-0.5 seconds.
Solderability (Pb-free)	IPC/ECA J-STD-002, Test A1	For lead free solderability the parts are conditioned in a steam ager for 8 hours ±15 min. at a temperature of 93±3°C. Dipped in solder at 255°C ±5°C for 5 +0/-0.5 seconds.
Solder heat	JEDEC JESD22-B106	The test sample is subjected to a molten solder bath at 260 ±5°C for 10 seconds (96SC tin/silver/copper).
Solder heat (hand)	MIL-STD-202 Method 210, Condition A	The soldering iron is heated to 350°C ±10°C and applied to the terminations for a duration of 4 to 5 seconds.
Solvent cleaning	MIL-STD-883 Method 2015	Resistance to cleaning agents. Solvent – Novec 711PA & Topkleen EL-20A. Pulsed ultrasonic immersion 45°C-65°C. Separate samples subjected to solvent A, solvent B and solvent D.
Lead Integrity (Adhesion)	MIL-STD-883 Method 2025	Leads are bent through 90° until a fracture occurs.
Lead Integrity (Fatigue)	MIL-STD-883 Method 2004, Condition B2	The leads are bent to an angle of 15°. Each lead is subjected to 3 cycles.
Lead Integrity (Tension/Pull)	MIL-STD-883 Method 2004, Condition A1	Pull of 0.227kg applied for 30 seconds. The force is then increased until the pins snap.

PART NUMBER STRUCTURE

MGJ 2 D XX XXXX S C

- MGJ: Series name
- 2: Power rating
- D: Output type (S - Single, D - Dual, T - Triple, Q - Quad)
- XX: Input voltage
- XXXX: Output voltage
- S: RoHS compliant
- C: Package type (S - SIP, D - DIP, M - Surface mount, Z - ZIP)

CHARACTERISATION TEST METHODS

Ripple & Noise Characterisation Method

Ripple and noise measurements are performed with the following test configuration.

Component	Specification
C1	1µF X7R multilayer ceramic capacitor, voltage rating to be a minimum of 3 times the output voltage of the DC-DC converter
C2	10µF tantalum capacitor, voltage rating to be a minimum of 1.5 times the output voltage of the DC-DC converter with an ESR of less than 100mΩ at 100 kHz
C3	100nF multilayer ceramic capacitor, general purpose
R1	450Ω resistor, carbon film, ±1% tolerance
R2	50Ω BNC termination
T1	3T of the coax cable through a ferrite toroid
RLOAD	Resistive load to the maximum power rating of the DC-DC converter. Connections should be made via twisted wires

Differential Mode Noise Test Schematic

DC/DC Converter → C1 → C2 → C3 → R1 → T1 → R2

→ R1 → T1 → R2 → OSCILLOSCOPE

APPLICATION NOTES

Minimum load

The minimum load to meet datasheet specification is 10% of the full rated load across the specified input voltage range. Lower than 10% minimum loading will result in an increase in output voltage, which may rise to typically 1.25 times the specified output voltage if the output load falls to less than 5%.

Gate Drive Applications Advisory Note

For general guidance for product usage in gate drive applications please refer to “gate drive application notes”.

Capacitive loading and start up

Typical start up times for this series, with a typical input voltage rise time of 2.2 μ s and output capacitance of 10 μ F, are shown in the table below. The product series will start into capacitance ranging from 47 μ F up to 220 μ F with increased start times.

Model	Start-up time (ms)
MGJ2D051505SC	3
MGJ2D051509SC	4.5
MGJ2D051515SC	21
MGJ2D051802SC	4
MGJ2D052003SC	5
MGJ2D052005SC	5
MGJ2D121503SC	3
MGJ2D121505SC	3
MGJ2D121509SC	4
MGJ2D121515SC	14.5
MGJ2D121802SC	5

MGJ2D122003SC	5
MGJ2D122005SC	5.5
MGJ2D151505SC	2.5
MGJ2D151509SC	3
MGJ2D151515SC	10.5
MGJ2D151802SC	3
MGJ2D152003SC	5
MGJ2D152005SC	4.5
MGJ2D241503SC	3
MGJ2D241505SC	3
MGJ2D241509SC	3
MGJ2D241709SC	4
MGJ2D241802SC	3
MGJ2D242003SC	4
MGJ2D242005SC	4

Typical Start-Up Wave Form

CH1+2.00VB CH2 10.0VBM1.00ms 28-Nov-13 16:10 CH1 2.00V <10Hz

EFFICIENCY VS LOAD

5V INPUT

Load (%) → Efficiency (%)

12V INPUT

Load (%) → Efficiency (%)

15V INPUT

Load (%) → Efficiency (%)

24V INPUT

Load (%) → Efficiency (%)

TEMPERATURE DERATING GRAPHS

Group 1: 051505, 052005, 121802, 122003, 151802, 152003, 241802 & 242003

Safe Operating Area

Ambient Temperature (°C): -40 → 95

Group 2: 051515, 051802, 052003, 121503, 121515 & 151515

Safe Operating Area

Ambient Temperature (°C): -40 → 85

Group 3: All other variants

Safe Operating Area

Ambient Temperature (°C): -40 → 100

POSITIVE OUTPUT VOLTAGE TOLERANCE ENVELOPES

The voltage tolerance envelopes show typical load regulation characteristics for this product series. The tolerance envelope is the maximum output voltage variation due to changes in output loading and set point accuracy.

Group 1: 051505, 051509, 151505 & 151509

Output Load Current (%) (10→100) → Voltage Variation (%) (-4%→4%)

Group 2: 122005, 152005 & 242005

Output Load Current (%) (10→100) → Voltage Variation (%) (-5%→3%)

Group 3: 121509, 241509 & 052005

Output Load Current (%) (10→100) → Voltage Variation (%) (-7%→4%)

Group 4: 121505 & 241505

Output Load Current (%) (10→100) → Voltage Variation (%) (-3%→5%)

Group 5: 121515 & 151515

Output Load Current (%) (10→100) → Voltage Variation (%) (-4%→6%)

Group 6: 051515

Output Load Current (%) (10→100) → Voltage Variation (%) (-7%→6%)

Group 7: 241709

Output Load Current (%) (10→100) → Voltage Variation (%) (-3%→7%)

Group 8: 122003, 152003 & 242003

Output Load Current (%) (10→100) → Voltage Variation (%) (-7%→5%)

Group 9: 121802, 151802 & 241802

Output Load Current (%) (10→100) → Voltage Variation (%) (-6%→5%)

Group 10: 241503

Output Load Current (%) (10→100) → Voltage Variation (%) (-5%→5%)

Group 11: 052003

Output Load Current (%) (10→100) → Voltage Variation (%) (-7%→5%)

Group 12: 051802

Output Load Current (%) (10→100) → Voltage Variation (%) (-6%→5%)

Group 13: 121503

Output Load Current (%) (10→100) → Voltage Variation (%) (-5%→5%)

NEGATIVE OUTPUT VOLTAGE TOLERANCE ENVELOPES

Group 1: 051509, 052005, 121505, 122005, 152005 & 242005

Output Load Current (%) (10→100) → Voltage Variation (%) (-4%→8%)

Group 2: 151505

Output Load Current (%) (10→100) → Voltage Variation (%) (-4%→7%)

Group 3: 121509 & 241509

Output Load Current (%) (10→100) → Voltage Variation (%) (-4%→5%)

Group 4: 051505

Output Load Current (%) (10→100) → Voltage Variation (%) (-6%→4%)

Group 5: 151509 & 241505

Output Load Current (%) (10→100) → Voltage Variation (%) (-3%→6%)

Group 6: 121515 & 151515

Output Load Current (%) (10→100) → Voltage Variation (%) (-4%→6%)

Group 7: 051515

Output Load Current (%) (10→100) → Voltage Variation (%) (-7%→6%)

Group 8: 052003

Output Load Current (%) (10→100) → Voltage Variation (%) (-7%→9%)

Group 9: 051802

Output Load Current (%) (10→100) → Voltage Variation (%) (-5%→13%)

Group 10: 121503

Output Load Current (%) (10→100) → Voltage Variation (%) (-8%→5%)

Group 11: 241709

Output Load Current (%) (10→100) → Voltage Variation (%) (-4%→6.5%)

Group 12: 122003, 152003 & 242003

Output Load Current (%) (10→100) → Voltage Variation (%) (-5%→9%)


Group 13: 121802, 151802 & 241802

Output Load Current (%) (10→100) → Voltage Variation (%) (-3%→13%)

Group 14: 241503

Output Load Current (%) (10→100) → Voltage Variation (%) (-4%→10%)

PACKAGE SPECIFICATIONS

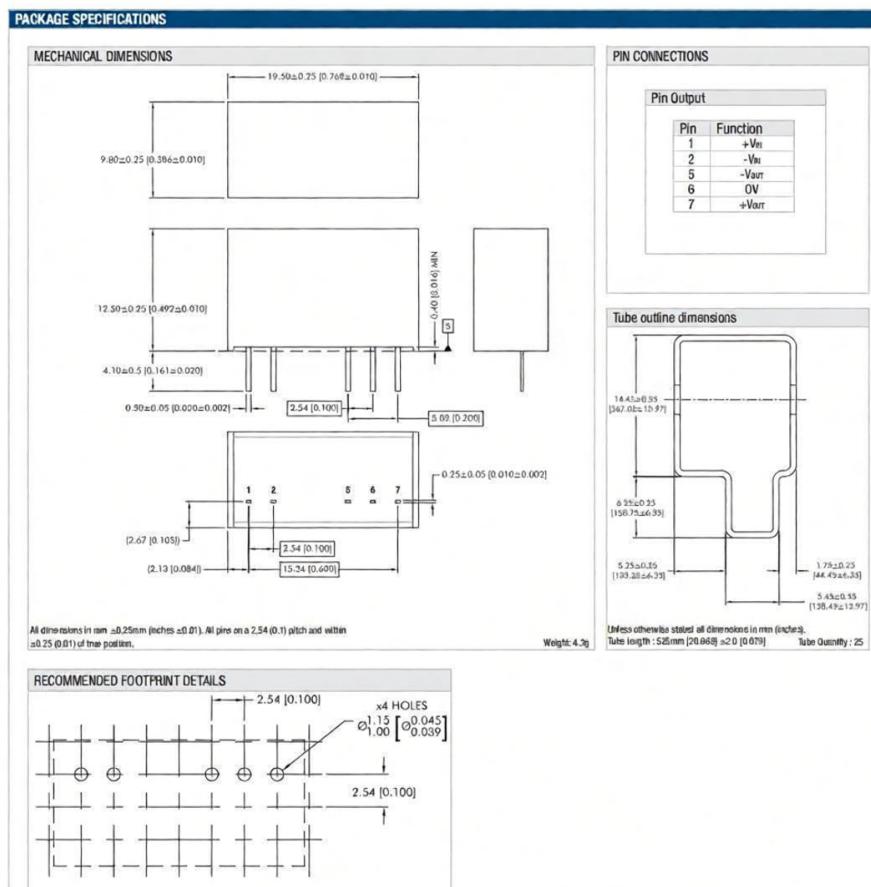

PIN CONNECTIONS

Pin	Function
1	+VIN
2	-VIN
5	-VOUT
6	OV
7	+VOUT

Tube outline dimensions

- Tube length: 525mm [20.669in] \pm 2.0mm [0.079in]
- Tube diameter: 5.25 \pm 0.25mm [133.35 \pm 6.35in]
- Tube Quantity: 25
- Unless otherwise stated all dimensions in mm (inches).

RECOMMENDED FOOTPRINT DETAILS

- 2.54mm [0.100in] x4 HOLES
- Pitch: 2.54mm [0.100in]

DISCLAIMER

Unless otherwise stated in the datasheet, all products are designed for standard commercial and industrial applications and NOT for safety-critical and/or life-critical applications.

Particularly for safety-critical and/or life-critical applications, i.e. applications that may directly endanger or cause the loss of life, inflict bodily harm and/or loss or severe damage to equipment/property, and severely harm the environment, a prior explicit written approval from our company is strictly required. Any use of our standard products for any safety-critical, life-critical or any related applications without any prior explicit written approval from our company shall be deemed unauthorised use.

These applications include but are not limited to:

- Aircraft equipment
- Aerospace equipment
- Undersea equipment
- Power plant control equipment
- Medical equipment
- Transportation equipment (automobiles, trains, ships, etc.)
- Traffic signal equipment
- Disaster prevention / crime prevention equipment
- Data Processing equipment

Our company makes no express or implied warranty, representation, or guarantee of suitability, fitness for any particular use/purpose and/or compatibility with any application or device of the buyer, nor does our company assume any liability whatsoever arising out of unauthorised use of any of our products for the application of the buyer. The suitability, fitness for any particular use/purpose and/or compatibility of our product with any application or device of the buyer remain to be the responsibility and liability of the buyer.

Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards that anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm, and take appropriate remedial actions. Buyer will fully indemnify and hold our company, its affiliated companies, and its representatives harmless against any damages arising out of unauthorised use of any of our products in any safety-critical and/or life-critical applications.

Our company makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

© 2023 All Rights Reserved.

www.micrc.com