

- 2" x 1" x 0.4" metal package
- Ultra wide 4:1 input voltage range
9–36, 18–75, 43–160 VDC
- EN 50155 approval for railway applications
- Thermal shock and vibration resistant according EN 61373
- High efficiency up to 92%
- Operating temperature range
–40°C to +85°C
- Under voltage lock-out circuit
- Remote On/Off and Output voltage adjustable
- 3-year product warranty



The TEN 40WIR series is a family of high performance 40 Watt DC/DC converter modules featuring ultra wide 4:1 input voltage ranges in a 2" x 1" x 0.4" package with industry-standard footprint. Input voltages up to 160 VDC, excellent EMC characteristics and EN 50155 approval make this product the best choice for many demanding applications in railroad and transportation systems. Further standard features include remote On/Off, over voltage protection, under voltage lockout and short circuit protection. Low input current characteristics at minimal load make these converters also the ideal solution for battery-operated systems. Typical applications are in wireless networks, telecom/-datacom, industry control systems and measurement equipment.

Models

Order Code	Input Voltage Range	Output 1		Output 2		Efficiency typ.
		Vnom	I _{max}	Vnom	I _{max}	
TEN 40-2410WIR	9 - 36 VDC (24 VDC nom.)	3.3 VDC	10'000 mA			90 %
TEN 40-2411WIR		5 VDC	8'000 mA			91 %
TEN 40-2412WIR		12 VDC	3'333 mA			92 %
TEN 40-2413WIR		15 VDC	2'666 mA			92 %
TEN 40-2415WIR		24 VDC	1'666 mA			91 %
TEN 40-2422WIR		+12 VDC	1'666 mA	–12 VDC	1'666 mA	90 %
TEN 40-2423WIR		+15 VDC	1'333 mA	–15 VDC	1'333 mA	90 %
TEN 40-2425WIR		+24 VDC	833 mA	–24 VDC	833 mA	91 %
TEN 40-4810WIR	18 - 75 VDC (48 VDC nom.)	3.3 VDC	10'000 mA			90 %
TEN 40-4811WIR		5 VDC	8'000 mA			91 %
TEN 40-4812WIR		12 VDC	3'333 mA			92 %
TEN 40-4813WIR		15 VDC	2'666 mA			92 %
TEN 40-4815WIR		24 VDC	1'666 mA			91 %
TEN 40-4822WIR		+12 VDC	1'666 mA	–12 VDC	1'666 mA	90 %
TEN 40-4823WIR		+15 VDC	1'333 mA	–15 VDC	1'333 mA	90 %
TEN 40-4825WIR		+24 VDC	833 mA	–24 VDC	833 mA	91 %
TEN 40-7210WIR	43 - 160 VDC (110 VDC nom.)	3.3 VDC	10'000 mA			88 %
TEN 40-7211WIR		5 VDC	8'000 mA			89 %
TEN 40-7212WIR		12 VDC	3'333 mA			91 %
TEN 40-7213WIR		15 VDC	2'666 mA			91 %
TEN 40-7215WIR		24 VDC	1'666 mA			90 %
TEN 40-7222WIR		+12 VDC	1'666 mA	–12 VDC	1'666 mA	89 %
TEN 40-7223WIR		+15 VDC	1'333 mA	–15 VDC	1'333 mA	89 %
TEN 40-7225WIR		+24 VDC	833 mA	–24 VDC	833 mA	91 %

Options

TEN-HS1	- Optional Heat Sink with Height = 0.22 inch: www.tracopower.com/products/ten-hs1.pdf
TEN-HS8	- Optional Heat Sink with Height = 0.3 inch: www.tracopower.com/products/ten-hs8.pdf
on demand (backorder with MOQ non stocking item)	- Optional Heat Sink with Height = 0.8 inch: www.tracopower.com/products/ten-hs10.pdf
	- Optional Heat Sink with Height = 0.5 inch: www.tracopower.com/products/ten-hs9.pdf

Note - The outputs of the ± 24 Vout models can also be used in serial circuit for 48 VDC operation. Free-wheeling diodes are not necessary but recommended for increased performance for start-up with inductive / capacitive load operation.

Input Specifications

Input Current	- At no load	24 Vin models: 15 mA typ. 48 Vin models: 10 mA typ. 110 Vin models: 10 mA typ.
Surge Voltage		24 Vin models: 50 VDC max. (1 s max.) 48 Vin models: 100 VDC max. (1 s max.) 110 Vin models: 170 VDC max. (1 s max.)
Under Voltage Lockout		24 Vin models: 7.5 VDC min. / 8 VDC typ. / 8.8 VDC max. 48 Vin models: 15 VDC min. / 16 VDC typ. / 17.5 VDC max. 110 Vin models: 37 VDC min. / 40 VDC typ. / 42 VDC max.
Reflected Ripple Current		20 mAp-p typ.
Recommended Input Fuse		24 Vin models: 8'000 mA (fast acting) 48 Vin models: 4'000 mA (slow blow) 110 Vin models: 3'150 mA (slow blow) (The need of an external fuse has to be assessed in the final application.)
Input Filter		Internal Pi-Type

Output Specifications

Output Voltage Adjustment		-10% to +20% (15 & 24 Vout models) $\pm 10\%$ (other models) (single output models only) (By external trim resistor) See application note: www.tracopower.com/overview/ten40wir Output power must not exceed rated power!
Voltage Set Accuracy		$\pm 1\%$ max.
Regulation	- Input Variation (Vmin - Vmax)	single output models: 0.2% max. dual output models: 0.2% max.
	- Load Variation (0 - 100%)	single output models: 0.5% max. dual output models: 1% max. (Output 1) 1% max. (Output 2)
	- Cross Regulation (25% / 100% asym. load)	dual output models: 5% max.

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Ripple and Noise (20 MHz Bandwidth)	- single output	3.3 Vout models: 75 mVp-p typ. (w/ 0.1 μ F, 50 V X7R) 5 Vout models: 75 mVp-p typ. (w/ 0.1 μ F, 50 V X7R) 12 Vout models: 100 mVp-p typ. (w/ 0.1 μ F, 50 V X7R) 15 Vout models: 100 mVp-p typ. (w/ 0.1 μ F, 50 V X7R) 24 Vout models: 150 mVp-p typ. (w/ 0.1 μ F, 50 V X7R)
	- dual output	12 / -12 Vout models: 100 / 100 mVp-p typ. (w/ 0.1 μ F, 50 V X7R) 15 / -15 Vout models: 100 / 100 mVp-p typ. (w/ 0.1 μ F, 50 V X7R) 24 / -24 Vout models: 150 / 150 mVp-p typ. (w/ 0.1 μ F, 50 V X7R)
	- single output	3.3 Vout models: 100 mVp-p max. (w/ 0.1 μ F, 50 V X7R) 5 Vout models: 100 mVp-p max. (w/ 0.1 μ F, 50 V X7R) 12 Vout models: 125 mVp-p max. (w/ 0.1 μ F, 50 V X7R) 15 Vout models: 125 mVp-p max. (w/ 0.1 μ F, 50 V X7R) 24 Vout models: 200 mVp-p max. (w/ 0.1 μ F, 50 V X7R)
	- dual output	12 / -12 Vout models: 125 / 125 mVp-p max. (w/ 0.1 μ F, 50 V X7R) 15 / -15 Vout models: 125 / 125 mVp-p max. (w/ 0.1 μ F, 50 V X7R) 24 / -24 Vout models: 200 / 200 mVp-p max. (w/ 0.1 μ F, 50 V X7R)
	- single output	3.3 Vout models: 26'600 μF max. 5 Vout models: 20'000 μF max. 12 Vout models: 3'900 μF max. 15 Vout models: 2'600 μF max. 24 Vout models: 1'300 μF max.
	- dual output	12 / -12 Vout models: 2'600 / 2'600 μF max. 15 / -15 Vout models: 1'600 / 1'600 μF max. 24 / -24 Vout models: 650 / 650 μF max.
Capacitive Load	- single output	3.3 Vout models: 26'600 μF max. 5 Vout models: 20'000 μF max. 12 Vout models: 3'900 μF max. 15 Vout models: 2'600 μF max. 24 Vout models: 1'300 μF max.
	- dual output	12 / -12 Vout models: 2'600 / 2'600 μF max. 15 / -15 Vout models: 1'600 / 1'600 μF max. 24 / -24 Vout models: 650 / 650 μF max.
Minimum Load		Not required
Temperature Coefficient		± 0.02 %/K max.
Start-up Time		60 ms typ.
Short Circuit Protection		Continuous, Automatic recovery
Overload Protection		Indefinite Mode
Output Current Limitation		125 - 210% of Iout max. 150% typ. of Iout max.
Overvoltage Protection		125% typ. of Vout nom. (By Zener diode)
Transient Response	- Response Deviation	10% max. (25% Load Step)
	- Response Time	250 μs typ. (25% Load Step)

Safety Specifications

Safety Standards	- IT / Multimedia Equipment	EN 60950-1 EN 62368-1 IEC 60950-1 IEC 62368-1 UL 60950-1 UL 62368-1
	- Railway Applications	EN 50155
	- Certification Documents	www.tracopower.com/overview/ten40wir
Pollution Degree		PD 2

EMC Specifications

EMI Emissions	- Conducted Emissions	EN 50121-3-2 (EMC for Rolling Stock) EN 55032 class A (with external filter) EN 55032 class B (with external filter)
	- Radiated Emissions	EN 55032 class A (with external filter) EN 55032 class B (with external filter)
External filter proposal:		www.tracopower.com/overview/ten40wir

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

EMS Immunity		EN 50155 (Railway Applications)
		EN 50121-3-2 (EMC for Rolling Stock)
- Electrostatic Discharge	Air:	EN 61000-4-2, ± 8 kV, perf. criteria A
	Contact:	EN 61000-4-2, ± 6 kV, perf. criteria A
		EN 61000-4-3, 20 V/m, perf. criteria A
		EN 61000-4-4, ± 2 kV, perf. criteria A
- RF Electromagnetic Field		EN 61000-4-5, ± 2 kV, perf. criteria A
	Ext. input component:	220 μ F, 100 V, KY // SMDJ58A (24 Vin) 220 μ F, 100 V, KY // SMDJ120A (48 Vin) 2x 150 μ F, 200 V, KXJ // 2x SMDJ90A (110 Vin)
- EFT (Burst) / Surge		EN 61000-4-6, 10 Vrms, perf. criteria A
	Continuous:	EN 61000-4-8, 100 A/m, perf. criteria A
- Conducted RF Disturbances		1 s: EN 61000-4-8, 1000 A/m, perf. criteria A
- PF Magnetic Field		

General Specifications		
Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	-40°C to +85°C
		-40°C to +90°C (with Heat Sink)
	- Case Temperature	+105°C max.
	- Storage Temperature	-55°C to +125°C
Power Derating	- High Temperature	2.5 %/K above 60°C
		2.8 %/K above 65°C (with Heat Sink)
Cooling System		See application note: www.tracopower.com/overview/ten40wir
Remote Control	- Voltage Controlled Remote	Natural convection (20 LFM)
		On: 3.5 to 12 VDC or open circuit
		Off: 0 to 1.2 VDC or short circuit
	- Off Idle Input Current	Refers to 'Remote' and '-Vin' Pin
	- Remote Pin Input Current	3 mA max.
Altitude During Operation		-0.5 to 0.5 mA
Switching Frequency		5'000 m max.
Insulation System		225 - 275 kHz (PWM)
Isolation Test Voltage	- Input to Output, 60 s	250 kHz typ. (PWM)
Isolation Resistance	- Input to Output, 500 VDC	Functional Insulation
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	3'000 VDC (110 Vin models)
Reliability	- Calculated MTBF	1600 VDC (other models)
Washing Process		1'000 M Ω min.
	See Cleaning Guideline:	1'500 pF max.
Environment	- Vibration	900'000 h (MIL-HDBK-217F, ground benign)
	- Mechanical Shock	Allowed (hermetical product)
	- Thermal Shock	www.tracopower.com/info/cleaning.pdf
Housing Material		MIL-STD-810F
Base Material		EN 61373
Potting Material		MIL-STD-810F
Pin Material		EN 61373
Pin Foundation Plating		MIL-STD-810F
Pin Surface Plating		EN 50155
Housing Type		Copper
Mounting Type		Non-conductive FR4 (UL 94 V-0 rated)
Connection Type		Silicone (UL 94 V-0 rated)
Footprint Type		Copper
		Nickel (2 - 3 μ m)
		Tin (3 - 5 μ m), matte
		Metal Case
		PCB Mount
		THD (Through-Hole Device)
		2" x 1"

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.


Soldering Profile	Wave Soldering 265°C / 10 s max.
Weight	32 g
Thermal Impedance	- Case to Ambient 10.8 K/W typ. (without heatsink) 10.3 W/K typ. (with heatsink TEN-HS1) 9.3 W/K typ. (with heatsink TEN-HS8) 7.7 W/K typ. (with heatsink TEN-HS9) 6.2 W/K typ. (with heatsink TEN-HS10)
Environmental Compliance	- REACH Declaration www.tracopower.com/info/reach-declaration.pdf REACH SVHC list compliant REACH Annex XVII compliant www.tracopower.com/info/rohs-declaration.pdf Exemptions: 7a, 7c-I (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule). The SCIP number is provided on request.) - Flammability (EN 45545-2) www.tracopower.com/info/en45545-declaration.pdf

Supporting Documents

Overview Link (for additional Documents)

www.tracopower.com/overview/ten40wir

Outline Dimensions

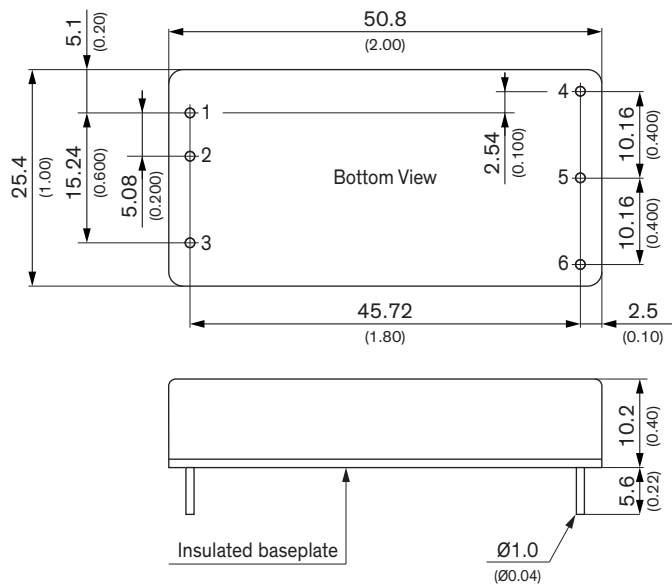

Dimensions in mm (inch)
Tolerance: x.x ±0.50 (±0.02)
Tolerance: x.xx ±0.25 (±0.01)
Pin pitch tolerance ±0.25 (0.01)
Pin dimension tolerance ±0.10 (0.04)

Pinout		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
3	Remote On/Off	Remote On/Off
4	+Vout	+Vout
5	-Vout	Common
6	Trim	-Vout