

**FEATURES**

- ▶ Fully encapsulated Plastic Case
- ▶ 3 Mounting Versions:
  - PCB Mounting with Solder Pins
  - Chassis Mounting with Screw Terminals
  - DIN-Rail Mounting
- ▶ Package Dimension 88.9x67.5x34.2 mm (PCB Version)
- ▶ Universal Input 85-264VAC, 47-440 Hz
- ▶ Protection Class II
- ▶ Extended Operating Temp.Range -40°C to +60°C at full Load
- ▶ LED Output Indicator (Chassis Version Models)
- ▶ Industrial Safety to UL/cUL/IEC/EN 60950-1 and UL508
- ▶ Medical Safety Approval to ANSI/AAMI ES60601-1 2XMOPP  
IEC/EN 60601-1 3<sup>rd</sup> Edition CB Report
- ▶ Over Load Protection
- ▶ 3 Year Product Warranty


**PRODUCT OVERVIEW**

The new MINMAX AYM-60 series is a range of fully encapsulated AC/DC power modules. These high performance products feature an extended operating temperature range of -40°C to +80°C. Universal input voltage 85-264VAC and UL/IEC/EN safety approvals including medical safety and UL508 listing qualify these power supplies modules for applications in products with worldwide markets. EMI-filter meets EN55022, class B and FCC, part 15, class B. The AYM-60 series power modules provide an economical solution for many space critical applications in commercial, medical and industrial electronic equipment.

**Model Selection Guide**

Model Number PCB Mounting (For model with Chassis Mounting, add suffix C)	Output Voltage	Output Current Max.	Input Current		Max. capacitive Load	Efficiency (typ.) @Max. Load, 115VAC
			115VAC, 60Hz	230VAC, 50Hz		
	VDC	mA	@Max. Load mA(typ.)		μF	%
AYM-60S051	5.1	10000	880	528	8000	84
AYM-60S12	12	5000	1000	600	3900	87
AYM-60S15	15	4000	1000	600	3300	87
AYM-60S24	24	2500	1000	600	1500	87
AYM-60S48	48	1250	988	593	680	88

**Input Specifications**

Parameter	Model	Min.	Typ.	Max.	Unit
AC Voltage Input Range	All Models	85	---	264	VAC
Input Frequency Range		47	---	440	Hz
DC Voltage Input Range		120	---	370	VDC
No-Load Power Consumption		---	---	0.5	W
Inrush Current (Cold Start at 25°C)	115VAC	---	---	30	A
	230VAC	---	---	60	A

**Output Specifications**

Parameter	Conditions	Min.	Typ.	Max.	Unit	
Output Voltage Accuracy		---	±1.0	±2.0	%	
Line Regulation	Vin=Min. to Max.	---	±0.2	±1.0	%	
Load Regulation	Iout=Min. to Max.	---	±0.5	±1.0	%	
Min.Load	No minimum Load Requirement					
Ripple & Noise <sub>(3)</sub>	0-20 MHz Bandwidth	(5.1VDC Output Models)	---	2.0	3.0	%V <sub>PP</sub> of Vo
		(Other Output Models)	---	1.0	1.5	%V <sub>PP</sub> of Vo
Over Voltage Protection	Zener diode clamp	---	120	---	% of Vo	
Temperature Coefficient		---	±0.02	---	%/°C	
Overshoot		---	---	5	%	
Current Limitation	85VAC, Hiccup Mode, auto-recovery (long term overload condition may cause damage)	105	---	---	%I <sub>nom</sub> .	
Short Circuit Protection	Hiccup mode, indefinite (automatic recovery)					

**General Specifications**

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage (reinforced)		4000	---	---	VACrms
Leakage Current		---	80	---	µA
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ
Switching Frequency		---	100	---	KHz
Hold-up Time	115VAC, 60Hz	---	20	---	ms
	230VAC, 50Hz	---	80	---	ms
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	125,000	---	---	Hours
Protection Class II	According IEC/EN 60536				
Safety Approvals	IEC/EN 60950-1 CB Report, cUL/UL 60950-1, CSA-C22.2 No.60950-1, UL508 listed certificate IEC/EN 60601-1 3 <sup>rd</sup> Edition CB Report, ANSI/AAMI ES60601-1 2XMOPP, CAN/CSA-C22.2 No.60601-1 certificate				

**EMC Specifications**

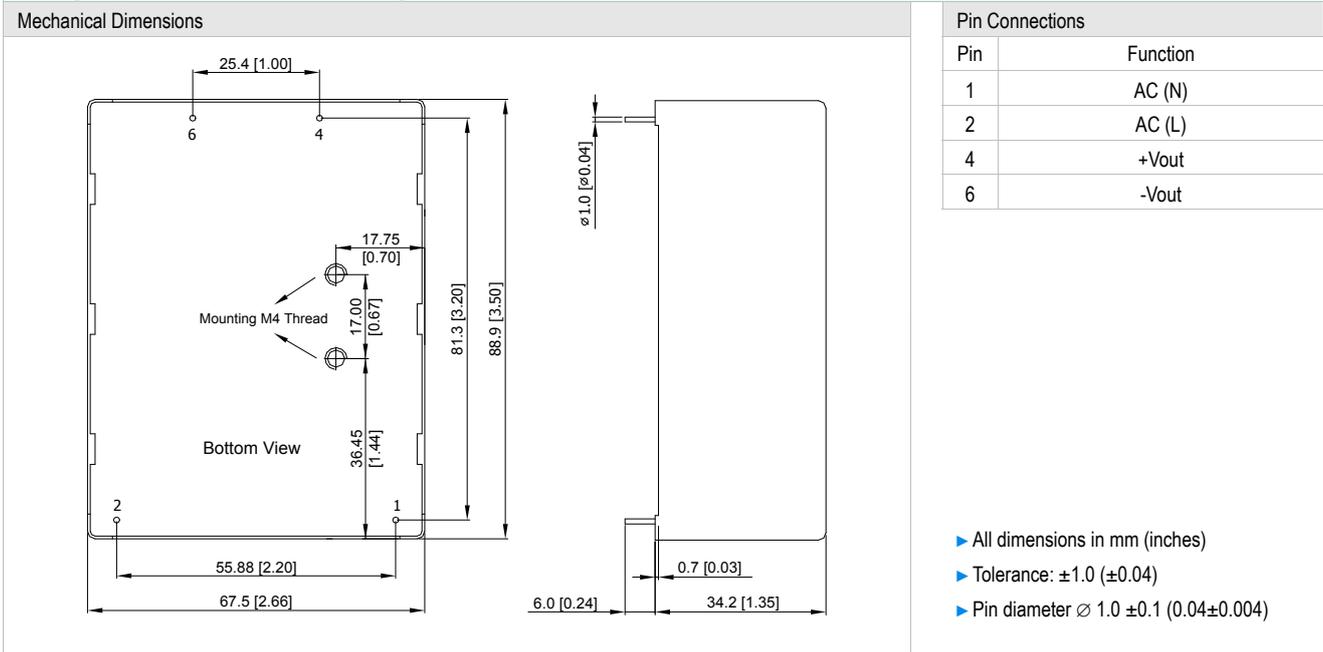
Parameter	Standards & Level	Performance	
EMI	EN55011, EN55022, EN61000-6-4, EN61000-6-3, FCC part 15	Class B	
EMS	EN60601-1-2, EN55024, EN61000-6-2, EN61000-6-1		
	ESD	EN61000-4-2 air ± 8kV , Contact ± 4kV	A
	Radiated immunity	EN61000-4-3 10V/m	A
	Fast transient	EN61000-4-4 ±2kV	A
	Surge	EN61000-4-5 ±1kV	A
	Conducted immunity	EN61000-4-6 10Vrms	A
	PFFM	EN61000-4-8 30A/M	A
	Dips	EN61000-4-11 30% 10ms	A
	Interruptions	EN61000-4-11 >95% 5000ms	B

**Environmental Specifications**

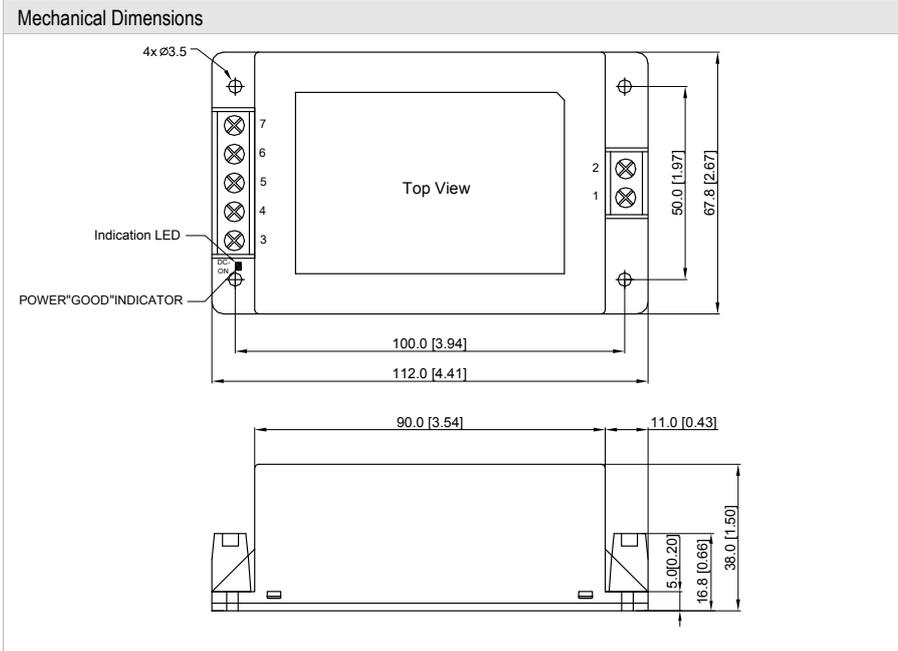
Parameter	Conditions	Min.	Max.
Temperature Range (operational)	Ambient	-40°C	+80°C
Power Derating	Above +60°C		2.3W / °C
Storage Temperature Range		-40°C	+95°C
Humidity (non condensing)		---	95% rel. H
Cooling	Free-Air convection		

**Notes**

- 1 **This product is not designed for use in critical life support systems, equipment used in hazardous environment, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet.**
- 2 Specifications typical at Ta=+25°C, resistive load, 115VAC, 60Hz input voltage, after warm-up time rated output current unless otherwise noted.
- 3 Ripple & Noise of PCB mounting type measured with a 0.1μF/50V MLCC and a 1μF/50V Aluminum electrolytic.
- 4 Safety approvals cover frequency 47-63 Hz.
- 5 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 6 Other input and output voltage may be available, please contact factory.
- 7 To order the module with chassis mount package, please add a **suffix C** (e.g. AYM-60S12C).
- 8 Part number for DIN-Rail mounting bracket: **AC-DIN-02**
- 9 That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
- 10 Specifications are subject to change without notice.

**Package Specifications PCB Mounting**

**Physical Characteristics**

Case Size	: 88.9x67.5x34.2mm (3.50x2.66x1.35 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Pin Material	: Copper Alloy with Gold Plate Over Nickel Subplate
Weight	: 360g

**Package Specifications Chassis Mounting (order code suffix C)**


**Connections**

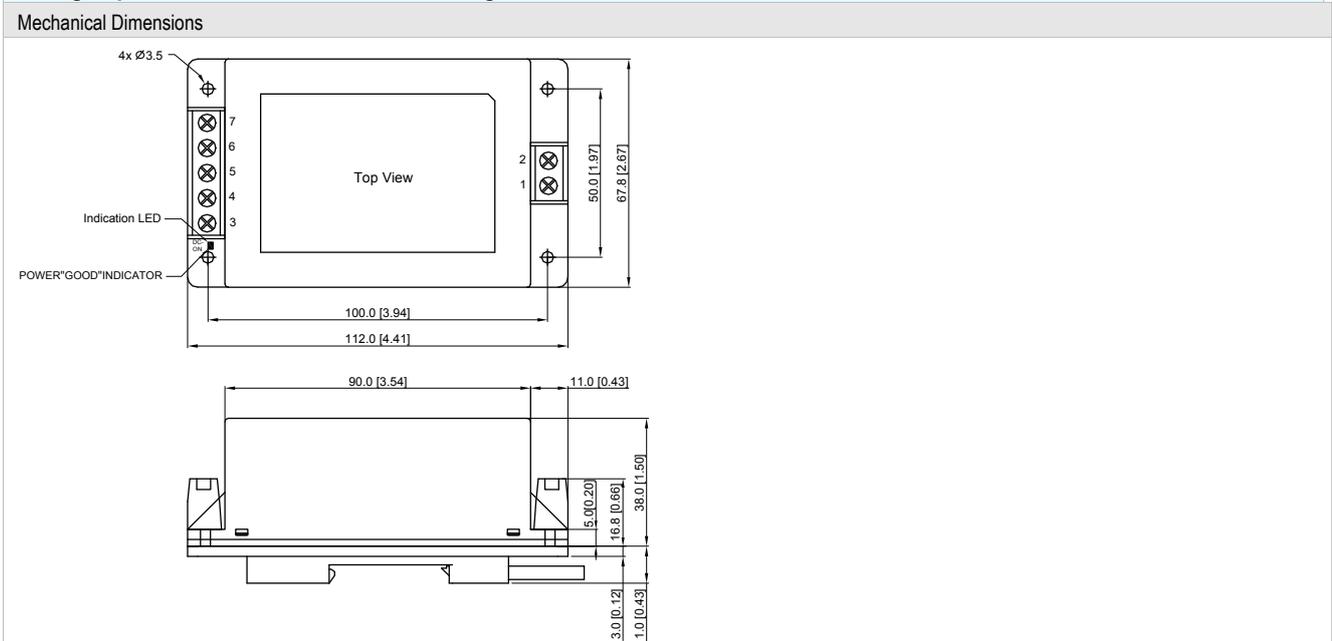
Pin	Function
1	AC (N)
2	AC (L)
3	NC
4	+Vout
5	NC
6	-Vout
7	NC

NC: No Connection

- ▶ All dimensions in mm (inches)
- ▶ Tolerance:  $\pm 1.0$  ( $\pm 0.04$ )

**Physical Characteristics**

Case Size	: 112.0x67.8x38.0mm (4.41x2.67x1.50 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Weight	: 380g

**Package Specifications with DIN Rail Mounting Bracket**

**Physical Characteristics**

Case Size	: 112.0x67.8x38.0mm (4.41x2.67x1.50 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Weight	: 433g

**DIN-Rail Mounting Bracket (Order Code for Kit : AC-DIN-02)**

