


ASC200EHI Series

Very High Isolation, 2W Short Circuit Protected DC/DC Converters

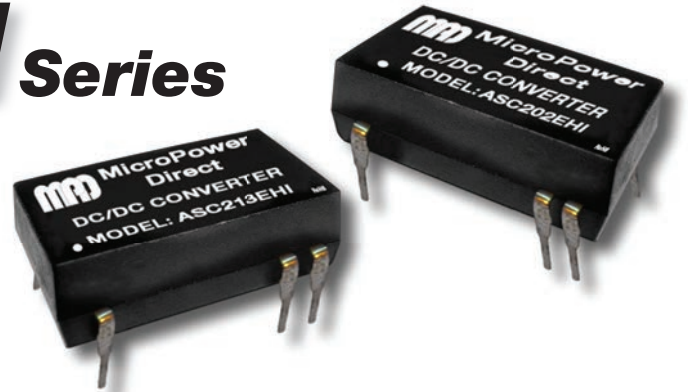

Key Features:

- 2W Output Power
- 6,000 VDC Isolation
- Short Circuit Protected
- -40°C to 85°C Operation
- Miniature DIP Case
- 5V, 12 and 24V Inputs
- Nine Standard Models
- 3.5 MH MTBF
- **LOW COST!!**



MicroPower Direct

292 Page Street
Suite D
Stoughton, MA 02072
USA

T: (781) 344-8226
F: (781) 344-8481
E: sales@micropowerdirect.com
W: www.micropowerdirect.com



Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Input Voltage Range	5 VDC Input	4.5	5.0	5.5	VDC	
	12 VDC Input	10.8	12.0	13.2		
	24 VDC Input	21.6	24.0	26.4		
Input Filter	Internal Capacitor					

Output						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Output Voltage Accuracy			±3.0		%	
Line Regulation	For Vin Change of 1%			±1.2	%/%	
Load Regulation, 5V Output	I _{out} = 10% to 100%		±12.8	±15	%	
Load Regulation, 12V Output	I _{out} = 10% to 100%		±6.8	±15	%	
Load Regulation, 15V Output	I _{out} = 10% to 100%		±6.3	±15	%	
Ripple & Noise (20 MHz)	See Note 3		150	200	mV P - P	
Temperature Coefficient				±0.03	%/°C	
Output Short Circuit	Continuous (Autorecover)					

General						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Isolation Voltage	60 Seconds	6,000			VDC	
Isolation Resistance	500 VDC	1,000			MΩ	
Isolation Capacitance	100 kHz, 1V		10		pF	
Switching Frequency			35		kHz	

Environmental						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Operating Temperature Range	Ambient	-40		+85	°C	
Storage Temperature Range		-55		+125	°C	
Cooling	Free Air Convection					
Humidity	RH, Non-condensing			95	%	

Physical						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Case Size		0.94 x 0.60 x 0.295 Inches (23.86 x 15.24 x 7.5 mm)				
Case Material		Non-Conductive Black Plastic (UL94-V0)				
Weight		0.134 Oz (3.8g)				

Reliability Specifications						
Parameter	Conditions	Min.	Typ.	Max.	Units	
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	3.5			MHours	

Absolute Maximum Ratings						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Input Voltage Surge (1 Sec)	5 VDC Input	-0.7		7.5	VDC	
	12 VDC Input	-0.7		15.0		
	24 VDC Input	-0.7		28.0		
Lead Temperature	1.5 mm From Case For 10 Sec.			260	°C	

Caution: Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.

www.micropowerdirect.com


Model Number	Input				Output			Efficiency (% Typ)	Fuse Rating Slow-Blow (mA)
	Voltage (VDC)		Current (mA)		Voltage (VDC)	Current (mA, Max)	Current (mA, Min)		
	Nominal	Range	Full-Load	No-Load					
ASC201EHI	5	4.5 - 5.5	526	100	5.0	400	40.0	76	1,500
ASC202EHI	5	4.5 - 5.5	506	100	12.0	167	17.0	79	1,500
ASC203EHI	5	4.5 - 5.5	512	100	15.0	133	13.0	78	1,500
ASC211EHI	12	10.8 - 13.2	219	100	5.0	400	40.0	76	1,500
ASC212EHI	12	10.8 - 13.2	208	100	12.0	167	17.0	80	1,500
ASC213EHI	12	10.8 - 13.2	211	100	15.0	133	13.0	79	1,500
ASC221EHI	24	21.6 - 26.4	108	50	5.0	400	40.0	77	500
ASC222EHI	24	21.6 - 26.4	104	50	12.0	167	17.0	80	500
ASC223EHI	24	21.6 - 26.4	107	50	15.0	133	13.0	78	500

Notes:


- Output load regulation is specified for a load change of 10% to 100%.
- These units should not be operated with a load under 10% of full load. Operation at no-load will not damage the unit, but they may not meet all specifications.
- These converters will operate without external components. However, when measuring output ripple, it is recommended that an external ceramic capacitor be placed from the +Vout pin to the -Vout pin for single output units and from each output to common for dual output units. An input capacitor will enhance stability over temperature and input line variations. Recommended capacitor values are given in the table above. For applications requiring very low output noise levels, a simple LC filter should be effective.
- It is recommended that a fuse be used on the input of a power supply for protection. See the Model Selection table above for the correct rating.

Vin	Input Capacitor	Vout	Output Capacitor
5 VDC	4.7 μ F	5 VDC	10.0 μ F
12 VDC	2.2 μ F	12 VDC	2.2 μ F
24 VDC	1.0 μ F	15 VDC	1.0 μ F

Derating Curve

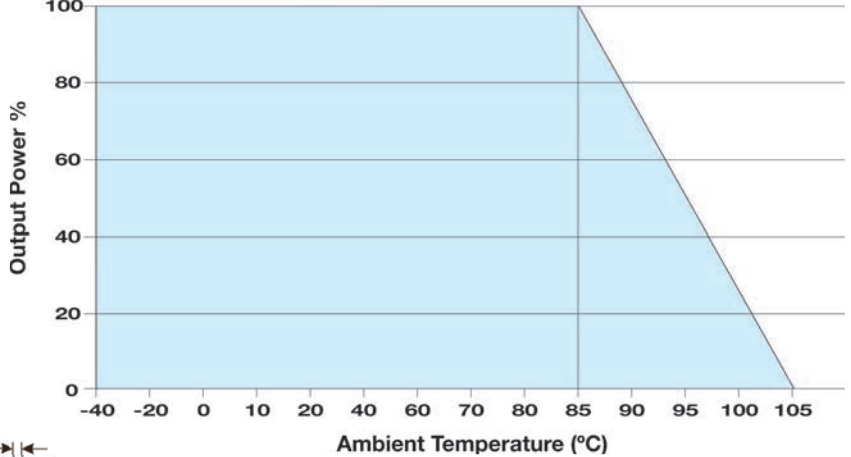

Mechanical Dimensions

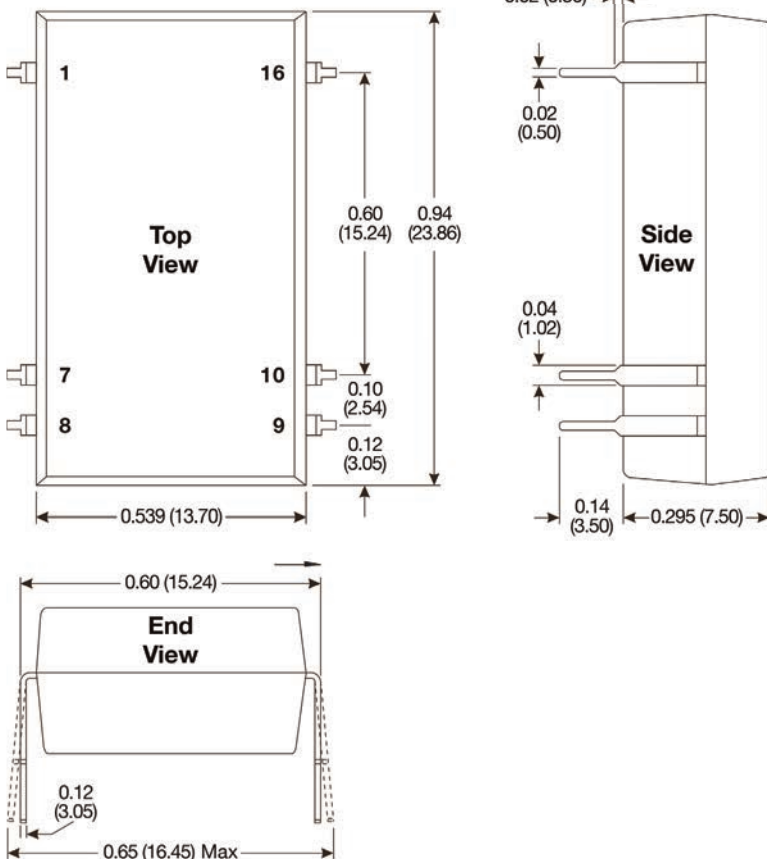

Pin Connections

Pin	Dual
1	-Vin
7	NC
8	NC
9	+Vout
10	-Vout
16	+Vin

NC = No Connection

Mechanical Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ± 0.01 (± 0.25)



MicroPower Direct
 We Power Your Success - For Less!