


E200E Series

Low Cost, 2W Ultra-Miniature SIP DC/DC Converters

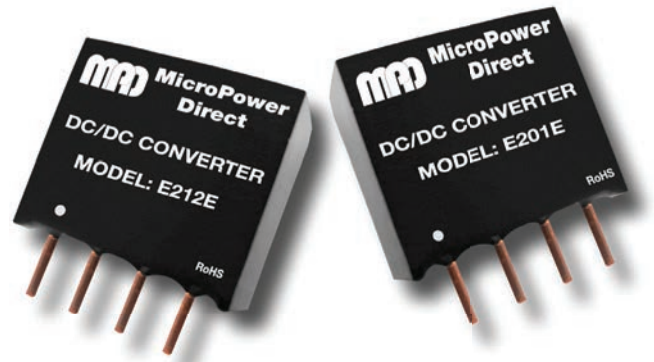

Key Features:

- 2W Output Power
- Ultra-Miniature SIP Case
- Wide Operating Temp.
- 1,000 VDC Isolation
- >3.5 MHour MTBF
- 5V & 12V Inputs
- **LOWEST COST!**



MicroPower Direct

292 Page Street
Suite D
Stoughton, MA 02072
USA

T: (781) 344-8226
F: (781) 344-8481
E: sales@micropowerdirect.com
W: www.micropowerdirect.com



Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Range	5 VDC Input	4.5	5.0	5.5	VDC
	12 VDC Input	10.8	12.0	13.2	
Input Filter	Internal Capacitor				

Output

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage Accuracy			±1.0	±3.0	%
Line Regulation	For Vin Change of 1%			±1.2	%
Load Regulation, See Note 1	5 VDC Output		10	15	%
	12 VDC Output		6.8	15	
	15 VDC Output		6.3	15	
Ripple & Noise (20 MHz)	See Note 2		75	150	mV P - P
Temperature Coefficient				±0.03	%/°C
Output Short Circuit	Momentary (0.5 Sec.)				

General

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage	60 Seconds	1,000			VDC
Isolation Resistance	1,000 VDC	1,000			MΩ
Isolation Capacitance	100 kHz, 1V		90		pF
Switching Frequency			75		kHz

Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	-40	+25	+85	°C
Storage Temperature Range		-55		+125	°C
Cooling	Free Air Convection				
Humidity	RH, Non-condensing			95	%

Physical

Case Size	0.46 x 0.40 x 0.30 Inches (11.6 x 10.2 x 7.5 mm)				
Case Material	Non-Conductive Black Plastic (UL-94V0)				
Weight	0.06 Oz (1.8g)				

Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	3.5			MHours

Absolute Maximum Ratings

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Surge (1 Sec)	5 VDC Input	-0.7		9.0	VDC
	12 VDC Input	-0.7		18.0	
Lead Temperature	1.5 mm From Case For 10 Sec			300	°C

Caution: Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.

www.micropowerdirect.com

Model Number	Input				Output			Load Regulation (% Max)	Efficiency (% Typ)	Fuse Rating Slow-Blow (mA)
	Voltage (VDC)		Current (mA)		Voltage (VDC)	Current (mA, Max)	Current (mA, Min)			
	Nominal	Range	Full-Load	No-Load						
E201E	5	4.5 - 5.5	513	38	5.0	400.0	40.0	15	78	1,000
E202E	5	4.5 - 5.5	506	38	12.0	167.0	17.0	15	79	1,000
E203E	5	4.5 - 5.5	506	38	15.0	133.0	14.0	15	79	1,000
E211E	12	10.8 - 13.2	214	20	5.0	400.0	40.0	15	78	500
E212E	12	10.8 - 13.2	208	20	12.0	167.0	17.0	15	80	500
E213E	12	10.8 - 13.2	206	20	15.0	133.0	14.0	15	82	500

Notes:


- Output load regulation is specified for a load change of 10% to 100%.
- When measuring output ripple, it is recommended that an external 0.33 μ F ceramic capacitor be placed from the +Vout pin to the -Vout pin.
- These units should not be operated with a load under 10% of full load. Operation at no-load will not damage the units, but they may not meet all specifications.
- These converters are specified for operation without external components. However, in some applications the addition of input/output capacitors will enhance stability and reduce output ripple. Recommended capacitor values are:

V _{IN}	Input Capacitor	V _{OUT}	Output Capacitor
5 VDC	4.7 μ F	5 VDC	10.0 μ F
12 VDC	2.2 μ F	12 VDC	2.2 μ F
		15 VDC	1.0 μ F


For applications requiring very low output noise levels, a simple LC filter should be effective.

- It is recommended that a fuse be used on the input of a power supply for protection. See the Model Selection table above for the correct rating.

Derating Curve

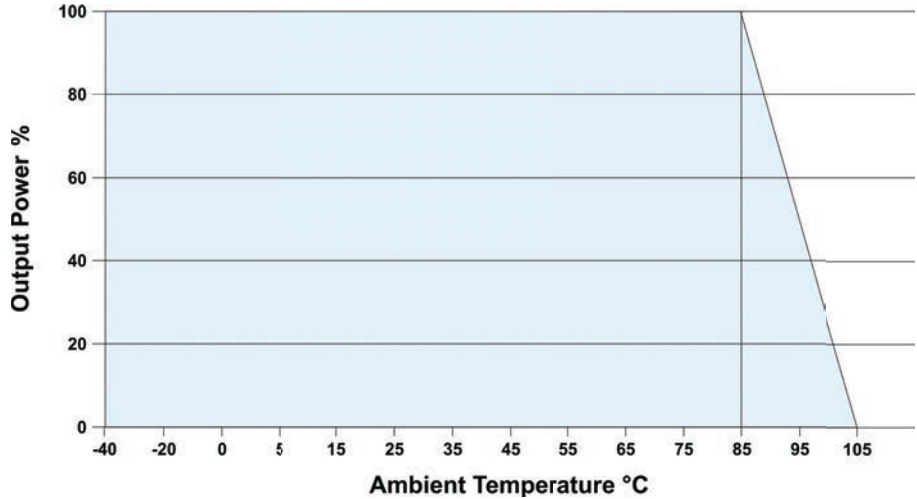

Mechanical Dimensions

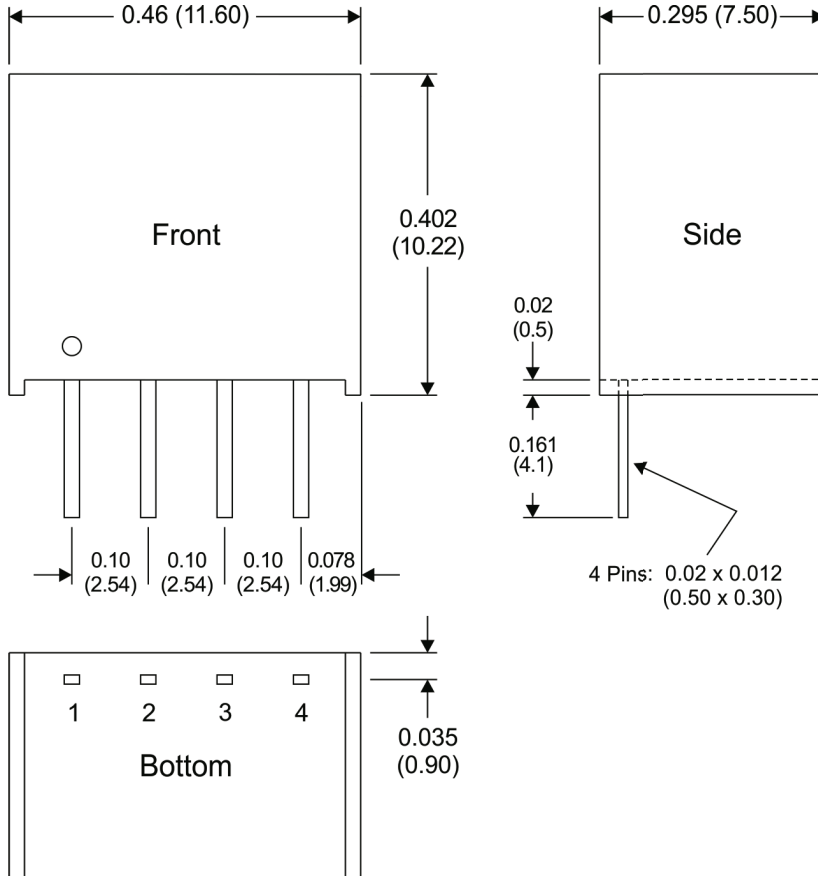

Pin Connections

Pin	Description
1	-Vin
2	+Vin
3	-Vout
4	+Vout

Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ± 0.01 (± 0.25)
- Pin 1 is marked by a "dot" or indentation on the front of the unit



MicroPower Direct

We Power Your Success - For Less!