

Features

Unregulated Converters

- 2W Single and Dual Outputs in DIP 14
- 3kVDC or 4kVDC Isolation
- Optional Continuous Short Circuit Protected
- Custom Solutions Available
- UL94V-0 Package Material
- Efficiency up to 85 %
- Suitable for IGBT Applications

Description

The RJZ and RGZ series converters are available in DIP14 packages, so can be used for applications where component height is restricted. The wide selection of input voltage and output voltage options plus an I/O-Isolation of 3kVDC or 4kVDC as standard makes these converters suitable for many industrial, medical and IGBT applications.

Selection Guide

Part Number	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency (%)	Max Capacitive Load ⁽¹⁾
RJZ-xx3.3S*	(H) 3.3,5,9,12,15,24	3.3	606	70-75	3300µF
RJZ-xx05S*	(H) 3.3,5,9,12,15,24	5	400	78-85	1200µF
RJZ-xx09S*	(H) 3.3,5,9,12,15,24	9	222	78-84	1200µF
RJZ-xx12S*	(H) 3.3,5,9,12,15,24	12	166	80-85	680µF
RJZ-xx15S*	(H) 3.3,5,9,12,15,24	15	133	82-85	680µF
RJZ-xx24S*	(H) 3.3,5,9,12,15,24	24	83	80-85	220µF
RGZ-xx3.3D*	(H) 3.3,5,9,12,15,24	±3.3	±303	75	±1500µF
RGZ-xx05D*	(H) 3.3,5,9,12,15,24	±5	±200	75-82	±470µF
RGZ-xx09D*	(H) 3.3,5,9,12,15,24	±9	±111	75-80	±470µF
RGZ-xx12D*	(H) 3.3,5,9,12,15,24	±12	±84	78-82	±220µF
RGZ-xx15D*	(H) 3.3,5,9,12,15,24	±15	±66	80-84	±220µF
RGZ-xx24D*	(H) 3.3,5,9,12,15,24	±24	±42	82-84	±100µF
RGZ-xx1509D*	(H) 5, 12, 24	+15/-9	+67/-111	70-81	±330µF

xx = Input Voltage. Other input and output voltage combinations available on request.

* add Suffix "P" for Continuous Short Circuit Protection, e.g. RGZ-0524D/P, RJZ-0505S/HP

Specifications (measured at T_A = 25°C, nominal input voltage, full load and after warm-up)

Input Voltage Range			±10%
Output Voltage Accuracy			±5%
Line Voltage Regulation			1.2%/1% of Vin typ.
Load Voltage Regulation (10% to 100% full load)	3.3V Types	±20% max.	
	5V Types	±15% max.	
	All other Types, RGZ-xx1509D	±10% max.	
Output Ripple and Noise (20MHz limited)			±150mVp-p max.
Temperature Coefficient			0.02%/°C max.
Operating Frequency	20kHz min. / 50kHz typ. / 90kHz max.		
	RGZ-xx1509D	20kHz min. / 45kHz typ.	
Efficiency at Full Load			70% min. / 80% typ.
Minimum Load = 0%	Specifications valid for 10% minimum load only.		
Isolation Voltage	(tested for 1 second)	3000VDC	
	(rated for 1 minute)	1500VAC / 60Hz	
Isolation Voltage	H-Suffix (tested for 1 second)	4000VDC min.	
	H-Suffix (rated for 1 minute)	2000VAC / 60Hz	
Isolation Capacitance			120pF max.
Isolation Resistance			15GΩ min.
Short Circuit Protection			1 Second
P-Suffix			Continuous
Operating Temperature Range (free air convection, without derating)			-40°C to +90°C (see Graph)
Case Temperature			110°C max.

continued on next page

ECONOLINE

DC/DC-Converter


with 3 year Warranty

RECOM

2 Watt

DIP14


Single & Dual Output

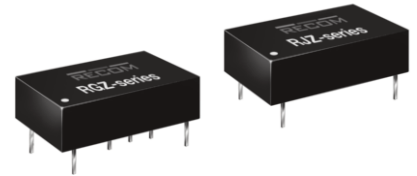

EN-60950-1 Certified
IEC/EN-60601-1 Certified*
*** +15/-9 Version excluded**

RJZ_RGZ

Derating-Graph (Ambient Temperature)

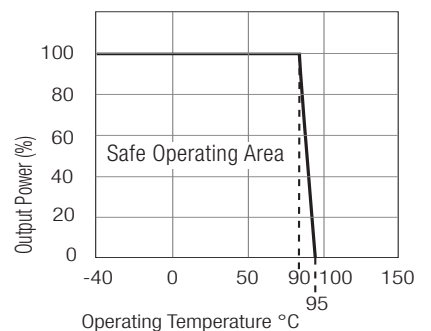

**Any data referred to in this datasheet are of indicative nature and based on our practical experience only. For further details, please refer to our Application Notes.

Refer to Application Notes

Specifications (measured at $T_A = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)

Storage Temperature Range				-55°C to +125°C
Relative Humidity				95% RH
Thermal Impedance				56.66°C / W
Package Weight				2.8g
Packing Quantity				24 pcs per Tube
MTBF (+25°C) (+85°C)	} Detailed Information see Application Notes chapter "MTBF"	using MIL-HDBK 217F	RJZ types	893 x 10 ³ hours
			RGZ types	810 x 10 ³ hours
		using MIL-HDBK 217F	RJZ types	208 x 10 ³ hours
			RGZ types	151 x 10 ³ hours

Certifications

EN General Safety
EN Medical Safety


Report: SPCLVD1109103
Report: SPCMDD120598-4

EN60950-1:2006 + A12:2011
IEC/EN 60601-1:2006, 3rd Edition

Notes



Note 1 Maximum capacitive load is defined as the capacitive load that will allow start up in under 1 second without damage to the converter.

IGBT Application Circuit


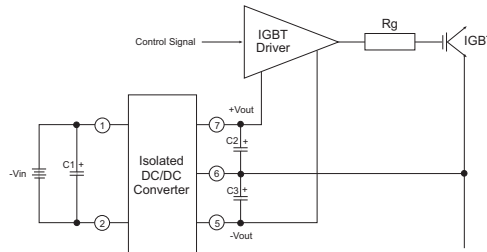


Typical Characteristics



RJZ-xx05S

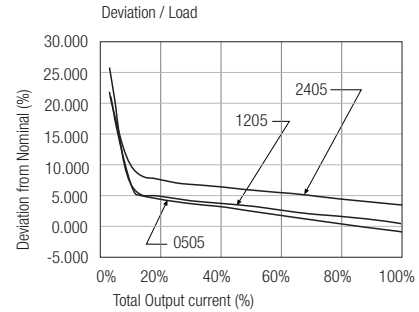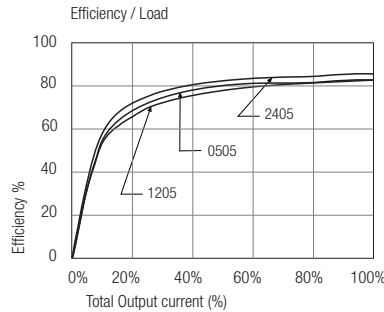

RJZ-xx09S

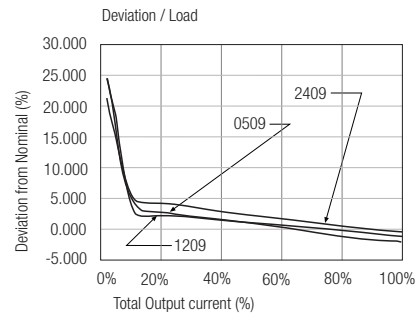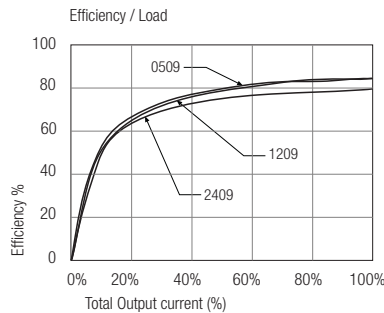



RJZ-xx12S

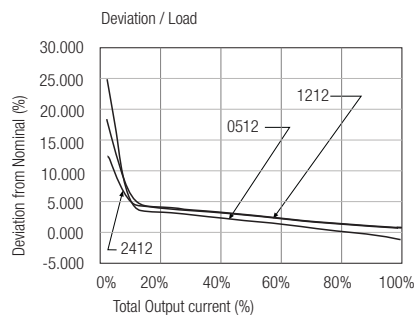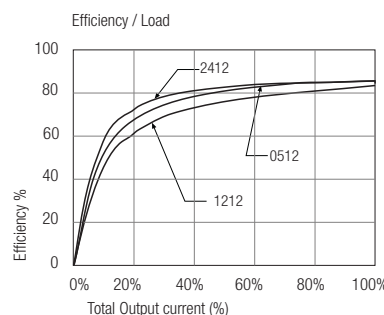


RJZ_RGZ

Typical Characteristics


RJZ-xx15S

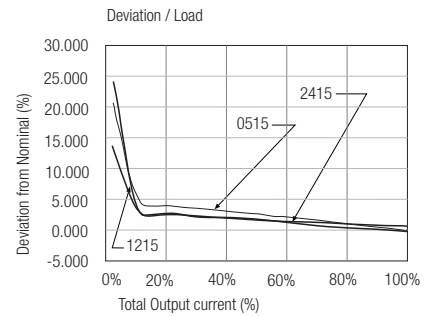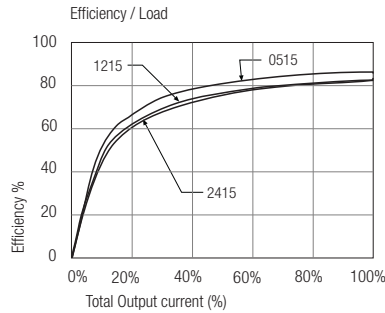





RGZ-xx05D

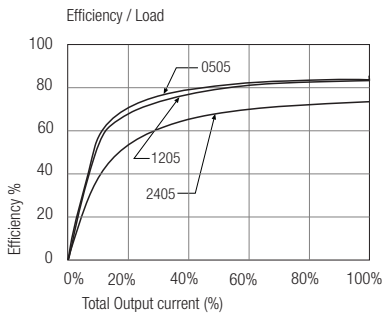

RGZ-xx12D

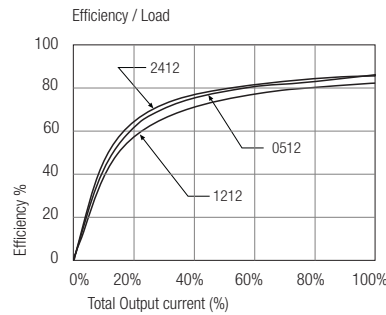





RGZ-xx15D

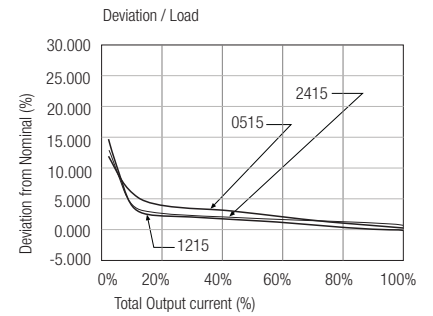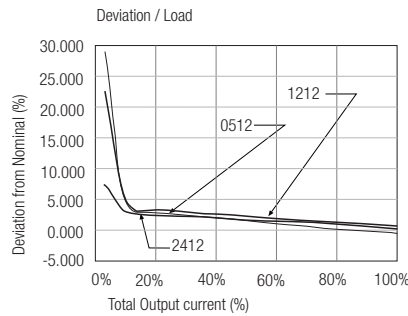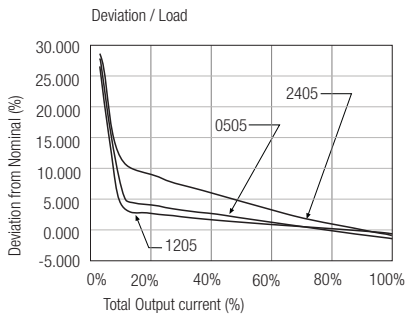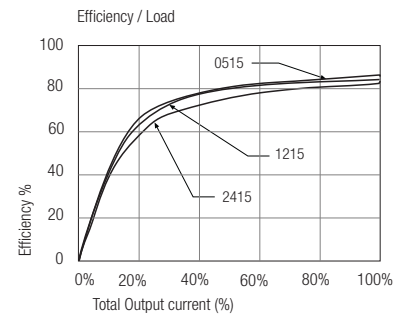



RJZ_RGZ

Package Style and Pinning (mm)

14 PIN DIP Package



Recommended Footprint Details



Pin Connections

Pin #	RJZ	RGZ
1	-Vin	-Vin
7	NC	NC
8	+Vout	+Vout
9	No Pin	Com
10	-Vout	-Vout
14	+Vin	+Vin

XX.X ± 0.5 mm
XX.XX ± 0.25 mm
NC = No Connection

The product information and specifications are subject to change without prior notice. All products are designed for non-safety critical commercial and industrial applications. The Buyer agrees to implement safeguards that anticipate the consequences of any failures that might cause harm, loss of life and/or damage property.